


Technical data sheet

SAATIBELT PES TT

Belting Solution for Food Drying

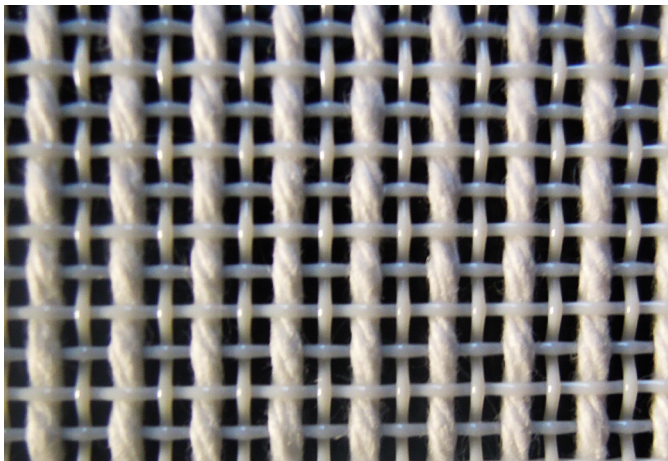

Key-Features:

- Slip-proof surface
- High tensile strength
- High precision consistency
- Smooth surface
- Excellent dimension stability
- Edge and joint customization
- Smooth PES fiber

TECHNICAL DATA	
PRODUCT NAME	Saatibelt® PES TT
WARP / WEFT COMPOSITION	Polyester
MESH OPENING	775 µm
OPEN AREA	29 %
WEIGHT	540 [g/m ²]
THICKNESS	1200 µm
AVAILABLE WIDTHS	up to 2500 mm
MAX. WORKING TEMPERATURE	120-130 [°C]
AIR PERMEABILITY @200mmWG	5800 l/m ² /s

The listed technical specifications are referred to mean values of production samples. In accordance with our policy of continuously improving our products, the above technical specifications are subject to change without any notice.

Main Application:

Decatizing



Photo courtesy of Stamperia Olonia S.a.S

Company Profile

SAATI is a leader in the production and distribution of dryer, conveyor and filter belts used in many applications. The SAATIBELT® line of products is manufactured from technically advanced fibers that offer the highest resistance, reliability and durability. SAATIBELT® conveyors are fabricated to customer's exact specifications in UNI EN ISO 9001 certificated facilities.