

# HI-LO<sup>®</sup> MESH

## Extreme Low Elongation Mesh For High-End Electronics Printing

SAATI HiLo is a super high modulus monofilament polyester mesh. It was developed specially for tight tolerance printing to fabricate high tech products, including touch screen panels, solar cells, and membrane switches.

SAATI uses a special fiber whose polymeric structure gives extraordinary physical & mechanical properties to the product:

1. Higher dimensional stability
2. Extremely low mesh relaxation
3. Plasma-activated surface for enhanced stencil adhesion


### KEY PRODUCT CHARACTERISTICS

- Top Print Quality
- Less tension loss during the print run
- Consistent performance during printing results in process reliability improvements
- Finer line Resolution
- Improved Ink Flow
- Superior Stencil Adhesion: less stencil breakdown and printing life far longer than conventionally treated fabrics




### 1. ELONGATION STATISTICS

HiLo 420.27

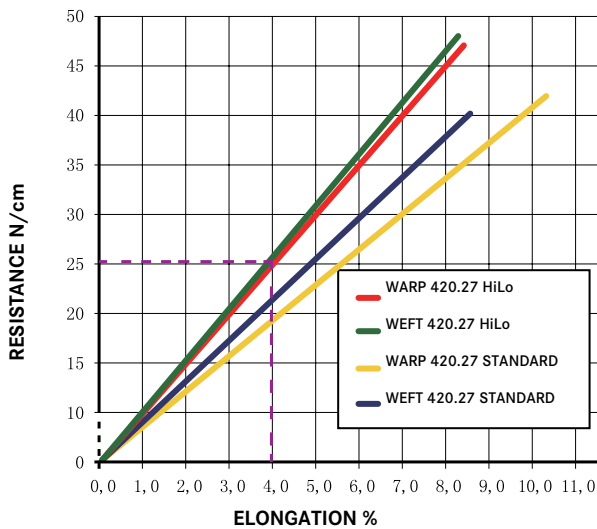

HiLo 355.31


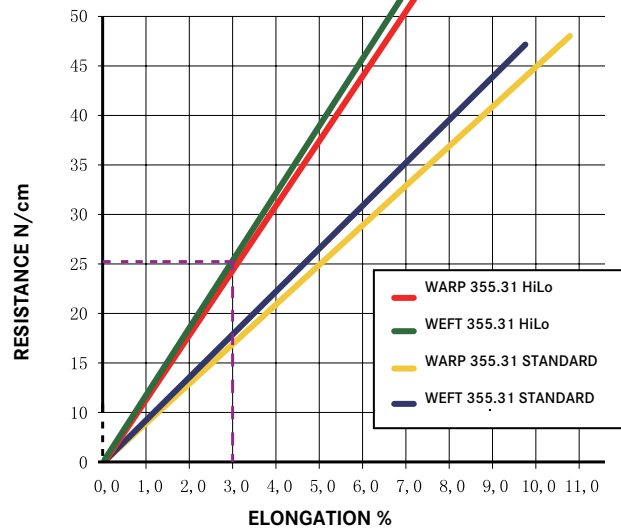


The HiLo Warp & Weft overlapping is almost perfect. At 25N tension level the HiLo 140.31 Elongation Percentage is around 3%, whereas the 165.27 is around 4%.

# HI-LO<sup>®</sup> MESH

## Extreme Low Elongation Mesh For High-End Electronics Printing



### 2. Dimensional Stability

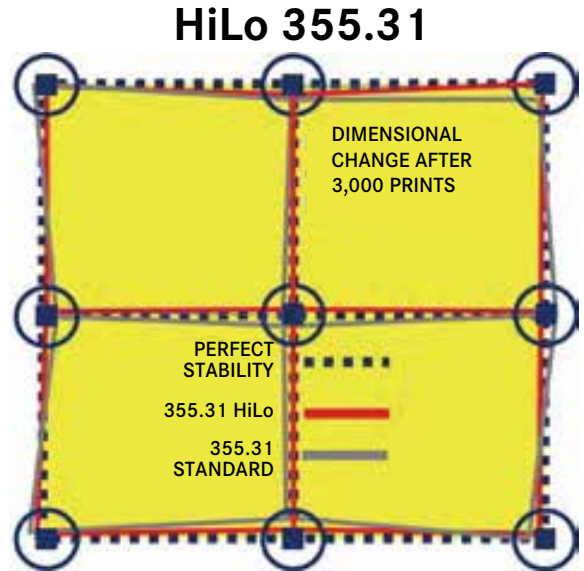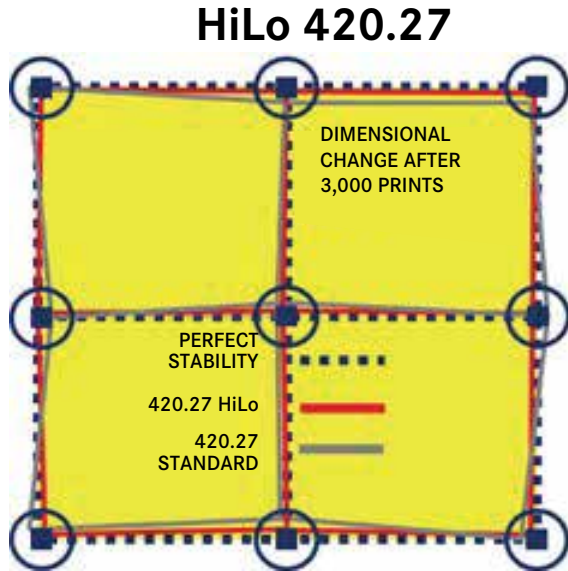

Extremely low mesh relaxation guarantees:

- Low tension loss after stretching
- Mesh ready to use in less time, as it can be brought to required tension quicker
- Printing quality consistency and improved ink flow during all production run

### 3. Tension Loss

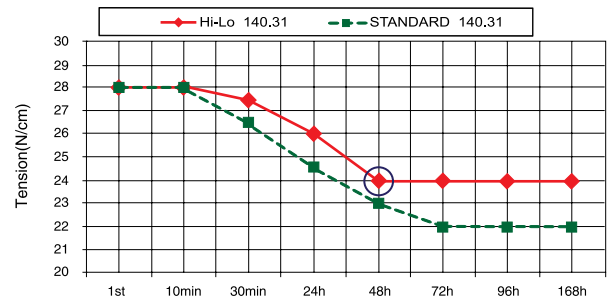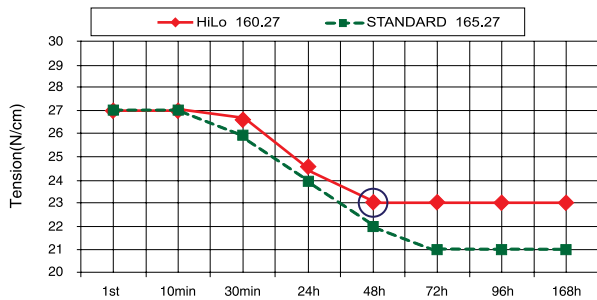

AVAILABILITY OF SAATI HiLo MESH						
Mesh Count (in)	Thread Diameter (µm)	Weave	Mesh Opening	Open Area	Thickness	Theoretical Ink Volume (cm <sup>3</sup> /m <sup>2</sup> )
420	27	PW	29	23	42	9.6
380	31	PW	30	21	43	8.7
355	31	PW	35	25	45	10.8
305	34	PW	43	26	53	14.1