

Table of Contents

company information	UZ
Customer Focus	05
SAATImotion Manufacturing	06
SAATImotion Fabrics	10
SAATImotion PEEK Fabrics	12
Surface Treatments	14
SAATImotion Hyphobe	15
abricated Components	18
amination Capabilities	20
nteractive Product Index	21
Contact Information	BACI

Engage with SAATI













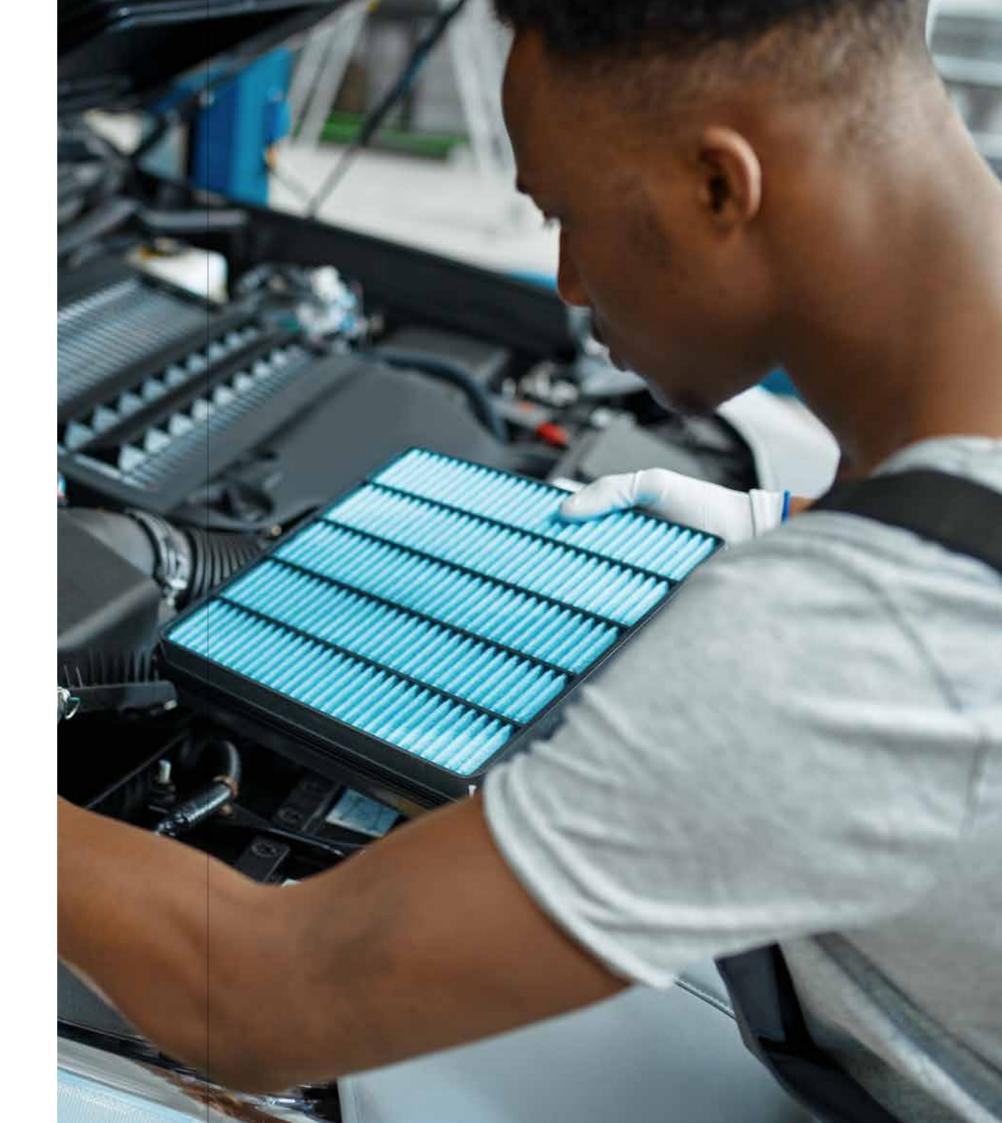



Perfecting the Art of Precision Woven Mesh

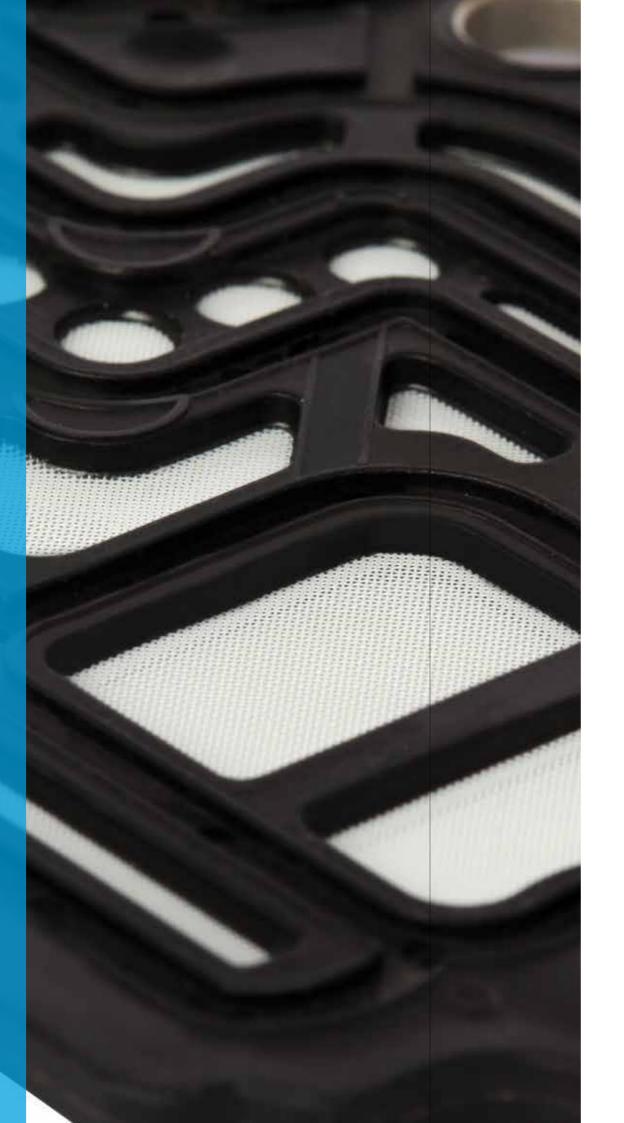



Company Information

Over Eighty Years of Innovative Action

SAATI is a multinational group with corporate headquarters that have been situated in northern Italy since 1935. Today we are a leader in the development, manufacturing and commercialization of advanced technical textiles & chemicals.

SAATI's passion and creativity are the foundation for an unsurpassed tradition of continuous innovation in the filtration markets. This endless pursuit is what drives SAATI's dedicated customercentric R&D to functionalize products beyond simple filtration.

SAATI's wide range of synthetic textiles and fabricated parts in Nylon, Polyester, Polypropylene, PEEK and PPS are the ideal engineered solution for demanding process filtration applications.

Through specialized processing and rigorous inspection, SAATI ensures consistent lot quality across tolerances, uniformity, strength, stability, and cleanliness for applications from 7 to 3,000 μ m.

Perfecting the Art of Precision Woven Fabrics with Innovation Driven R&D and Strict Quality Controls


Specific SAATI Automotive Grade fabrics are tested and certified in accordance with USP CLASS VI/ISO 10993 Regulations and they are manufactured in class 10,000/ISO 7 Clean Rooms in accordance with UNI ISO 9001 regulations.

To guarantee the reliability of our products we constantly run tests and have all the most updated and strict certifications that validate the consistency, performance, quality and characteristics of each item.

With about 1,000 employees worldwide, facilities and a strong established track record in innovation and manufacturing excellence, SAATI's mission is to improve the life of every person every day, through working with customers and partners to create a safer, healthier and cleaner world.





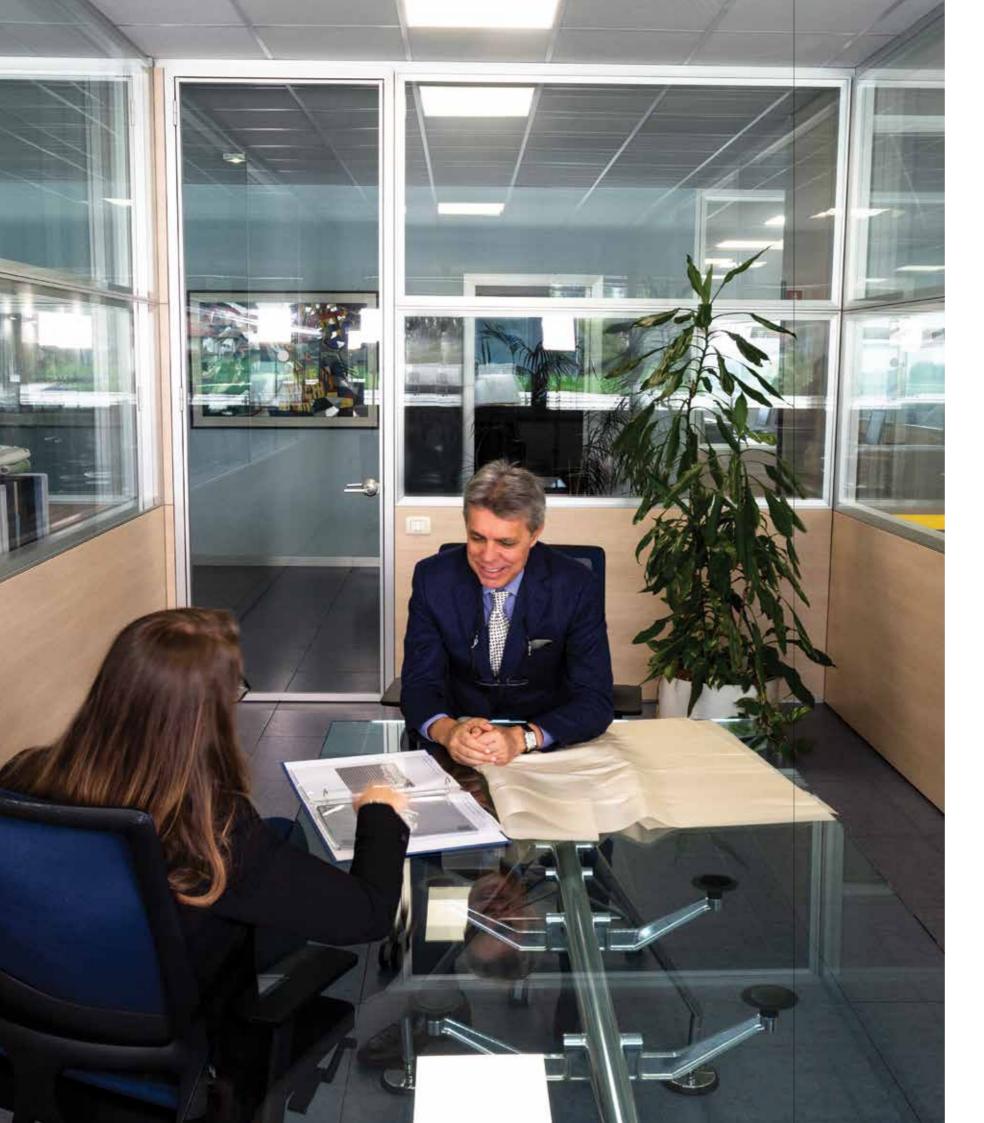



Customer Focus

Thanks to our direct presence in many countries, it is easy for customers to reach us, wherever they are located, and our response is always prompt. Our staff has a high level of technical expertise and dedication, and are always aiming to find the best solution for the customer's requirements.

SAATI sales representatives and engineers understand customers' applications, and work closely with staff in the production and R&D departments to offer a customized solution in a form that best meets their needs.

The quality of SAATI's automotive products is backed by the dedication and expertise of SAATI's customer service. Thanks to offices, warehouses, storage and fabrication facilities throughout the world, SAATI provides strong local support, expert responses to customer inquiries, strong engineering capability, technical support and fast delivery around the world.





SAATImotion Manufacturing

Automotive Devices


Automotive devices are among the most demanding fabric applications. SAATImotion automotive fabrics are more than up to the task; they are the preferred choice for components such as fuel injectors, water separators, in-line fuel filters, in-tank filters, SCR systems, gear boxes, hydraulic suspension, power steering, ABS, and engine & cabin air filters. The precise aperture size, uniform high flow rates, and lot-to-lot consistency make SAATImotion fabrics the ideal solution for demanding automotive applications.

Manufactured To The Most Exacting Standards

SAATImotion fabrics are woven with monofilament polyester, polyamide, PPS or PEEK fibers with smooth and uniform surfaces that are particularly suitable for automotive applications. The monofilament fibers are non-shredding to reduce the risk of particulate contamination. The fibers are woven to exceptionally tight tolerances, creating uniform pore sizes, excellent strength, and good dimensional stability.


Customized to Meet Specific Customer Needs

Typical surface modifications requested include plasma treatment, adding hydrophilic or hydrophobic characteristics, and dyeing in virtually any color. SAATI Engineers can also evaluate developing a fully customized solution using your specific chemistry applied to the mesh surface to functionalize the surface beyond simple filtration action.

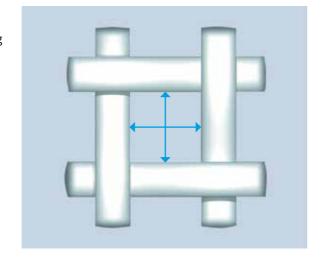

Precise Mesh Opening

The Mesh Opening is the square space between two warp and two weft yarns

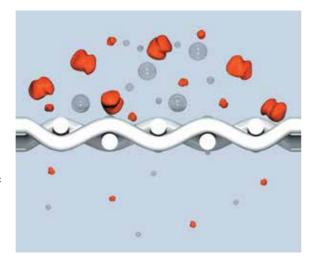

High flow rates with low pressure loss



SAATI Engineers can also evaluate developing a fully customized solution using your specific needs to functionalize the surface beyond simple filtration action.





SAATImotion

Enhancing The Performance Of Automotive Filtration Systems

Today, the motor vehicle industry requires increasingly advanced filtration performances to achieve maximum results at every production stage. Filter media plays a key-role as integral part of modern automotive systems.

That's why SAATImotion offers a wide range of filter media solutions thought out down to the smallest details to satisfy the required conditions of carmakers, automotive component manufacturers and injection molders.

SAATImotion's Automotive Industry Advantages


- Long lasting filters
- High dust holding capacity
- Excellent filtration efficiency
- Low pressure drop
- Resistance to common fuels
- Consistency and quality
- Non-shredding properties Good thermal stability
- Good chemical resistance
- High mechanical strength
- High workability
- Environmentally friendly (fully recyclable)
- Many years of expertise

Washing

- Water Reservoir Filters
- · Windshield Wiper Fluid Filters

Cabin

- · Air Conditioning Filtration
- Cabin Air Filters
- Automotive Electronics

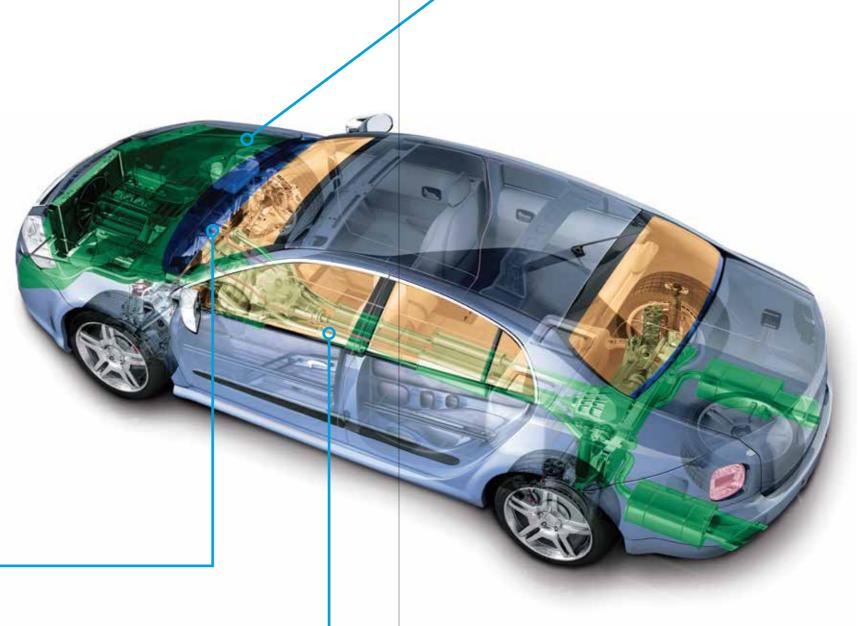

Powertrain

Air Management System

• Engine Air Filter

Engine Management System

- In-Tank Filter
- · Injection Filter
- Hydrophobic Pre-Filter (Water Separator)
- In-Line Fuel Filter
- · Silica Gel For Coolant

Transmission/Hydraulic

- Gear Box
- Hydraulic Suspension
- Power Steering
- ABS
- By-Pass

Emission Control/System

 SCR (Selective Catalytic Reduction) System

Contrary to metal wire mesh, SAATImotion fabrics are lightweight and fully recyclable being made of the same polymers used in plastic filter housing in vehicles.










SAATImotion Automotive Fabrics


Fabrics

SAATImotion includes a wide and complete range of avant-garde technical fabrics woven with monofilament yarns in different polymers such as polyester (PET) and polyamide (PA6.6), polypropylene (PP), PPS and PEEK.

SAATImotion fabrics guarantee a good performance against aggressive synthetic oils and several types of fuel thanks to a higher resistance to ageing in harsh environments and high flow capacity required by modern fuel delivery systems.

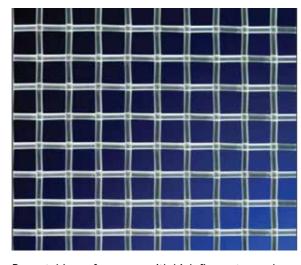

SAATImotion Fabrics Key Features

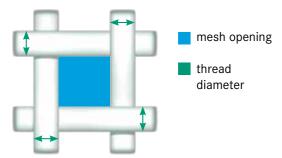

Repeatable performance with high flow rates and minimal clogging, ideal for a predictable particle removal. This ensures a longer life for filter systems.


All of our fabrics can grant exceptional mechanical performances, and are developed to resist up to particularly high tension levels.

These technical fabrics have uniform mesh opening (range from 7 to 2000 μ m), have a smooth surface, can be easily cleaned and are non-shredding.


Moreover, the overall screening performance and non-corroding properties make SAATImotion the ideal solution for fuel delivery and water systems.


Weave Types

weft

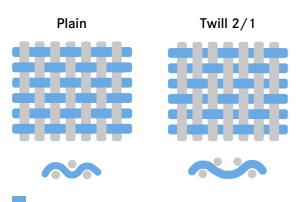





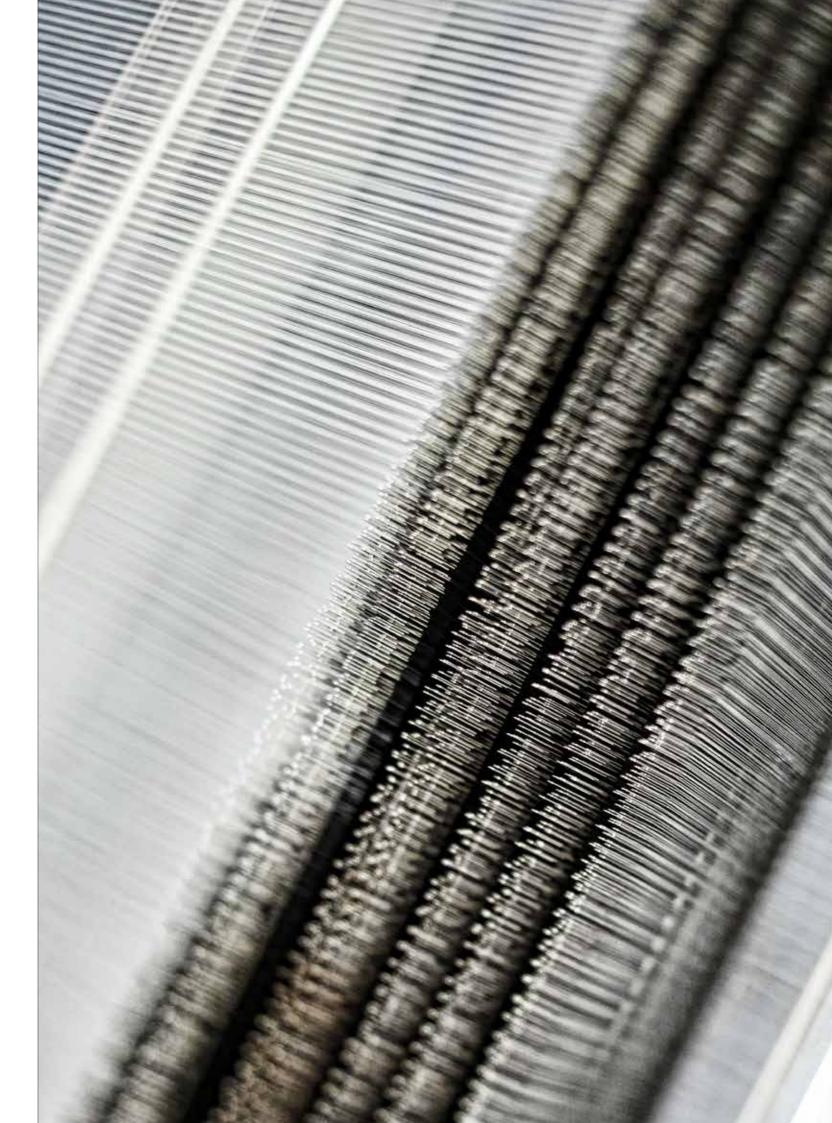



SAATImotion PEEK Fabrics


Poly ether ether ketone (PEEK) is a thermoplastic semicrystalline polymer belonging to the Polyaryletherketone (PAEK) family, characterized by outstanding properties which are maintained even at high temperature.

Thermal Properties

SAATImotion PEEK is characterized by a melting point around 320°C and a glass transition temperature around 156°C. Due to this it can be used as an alternative to wire mesh for high temperature application where standard synthetic fabrics fail.

Chemical Resistance

SAATImotion PEEK fabrics show a very high chemical resistance, even at high temperature. Only concentrated strong acids like sulphuric and nitric acids are capable to dissolve PEEK.

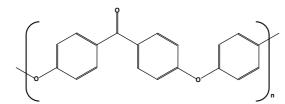

Mechanical Resistence

SAATImotion PEEK is characterized by a high mechanical properties, especially in terms of wear and friction resistance.

Hydrolysis Resistance

SAATImotion PEEK is suitable for applications where a significant hydrolysis resistance is required. Steam and high pressure water do not affect fabric mechanical properties, even after a long exposure.

Attribute	PEEK	PPS	PA	PES	PP
Temperature Resistance	+++	+++	+	+	-
Chemical Resistance	+++	++	+	+	++
Dimensional Stability	+++	++	+	++	+
Gamma Radiation	+++	++	++	++	+
Flex Fatigue	++	+	+++	++	+
Abrasion Resistance	++	+	+++	+	-
Relative Tensile Strength	++	++	++	++	+
Specific Weight	++	++	++	++	+++

Product	Mesh Opening	Open Area	Air Permeability [I/m ² s @ 200Pa]
PEEK 36/24	36	24	2740
PEEK 25/13	25	13	1320



Due to their properties PEEK fabrics are ideal for filtration application as substitution of traditional filter media such as PA, PES, PP or Wire mesh.

Below a typical PEEK fabric application in automotive filtration:

Injector Filters

Typically injector filters are realized

using PA mesh or Wire mesh. Both these solutions show potential limitations:

- Wire mesh offers high temperature and chemical resistance, however has poor fatigue resistance and requires expensive and dedicated toolings for injection molding process.
- PA mesh has the tendency to swell when in contact with hot fuels and provides poor resistance to some bio fuel blends, which could lead to component failure and damage.

PEEK fabrics are the ideal solution for

this application, since they can match the chemical, thermal and mechanical resistance properties of wire mesh and retain synthetic materials' ease of handling and processing.

Other Applications

- Intake Resonator: PEEK provides enhanced chemical resistance to protect intake sound dampening systems even in the harshest under-hood temperatures
- Oil Filter Bypass: Typically of PA or PES media, in applications requiring extended high temp. (>150°C) exposure, SAATImotion PEEK offers continuous performance through filter life.












Surface Treatments

In addition to the deep know-how in weaving, SAATI has unsurpassed experience in surface treatments, and knows how to finish the fabrics in order to enhance their mechanical performances, or to add further functional properties.

Almost any surface treatment can be applied including customers own proprietary coating.




Plasma Treatments SAATI has pioneered the use of cold plasma to modify the screen fabrics surface properties. The plasma treatment increases the fabrics hydrophilicity making it far more wettable. This also enhances the bond of subsequent coatings and plastics while leaving the undersurface properties completely unaffected. The intensity of the treatment can also be modified to meet customers unique requirements.



Hydrophobic Treatments This enables the separation of water from oil-based products such as fuels.

 Hydrophilic Treatments Optimizes the wetting process of the fabric's surface in terms of speed and effectiveness.





Dyeing Fabrics can be dyed to virtually any color. They are used for computer anti-glare screens, fashion shoes, hand bags and racing car air filters. Food grade dyes can be used. Select one of our many standard colors or have one specially matched.

 Antistatic Finishing An antistatic treatment can be applied to reduce the build-up of static charges often associated with synthetic fabrics.



In addition to these, SAATI R&D can study in partnership with the customers special different treatments according to specific application, needs and required performances.

SAATImotion Hyphobe®

Water Repellent Surface Treatment


The water separation efficiency of SAATImotion filter media for the automotive industry can be increased by applying SAATImotion Hyphobe® - a customized water repellant surface treatment - that satisfies the current requirements of diesel injection systems, leading to greater water separation.

Water-repelling effectiveness is determined by the contact angle between liquid droplet and the mesh surface. A liquid drop forms into a spherical shape because of the liquid surface tension.


When the liquid drop is in contact with a surface of solid material, the shape of the drop will change according to interaction created between the liquid and the solid material.

The lower the angle of contact the higher the wettability of the material




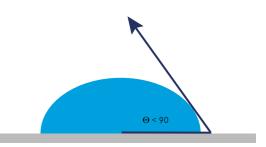

Contangle angle $\boldsymbol{\Theta}$ of a liquid drop on a standard fabric

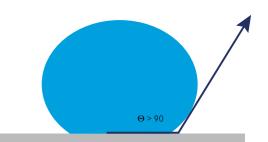

Contangle angle Θ of a liquid drop on a SAATImotion Hyphobe fabric

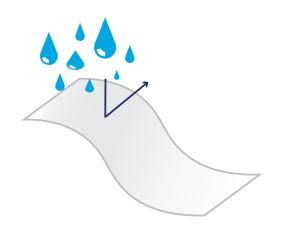

The hydrophobic treatment protects the filter media against liquids such as water







SAATImotion Hyphobe®

Main Advantages of SAATImotion Hyphobe® for Fuel/Water Separation:

- High levels of fuel filtration performance
- Low pressure drop at the filter
- Capability to capture small droplets even with fuel low interfacial tension.

In addition to Diesel-Water separator, Hyphobe® is suitable for other automotive applications such as:

- Hydrophobic pre-filter (water separator)
- Cabin Air Filter
- Acoustic screen for Automotive Electronics (SAATIfil Acoustex®)

LAB Capabilities


Homemade test bench built according to ISO 16332 for flat sheet test.









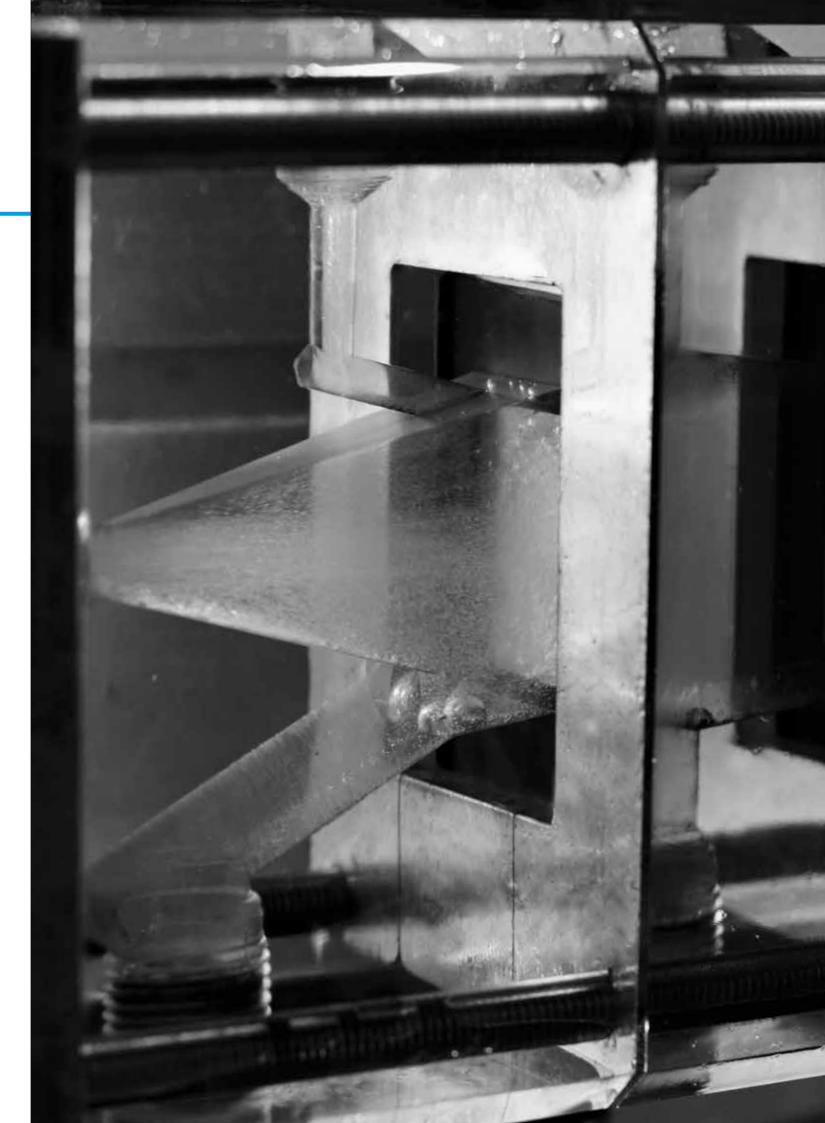



Fabricated Parts

SAATI not only designs and produces precision woven fabrics but has the ability to engineer them into finished or partly finished products.

Thanks to processing equipment and long experience, SAATI provides fabrics cut-to-fit, lot-to lot consistency and high quality custom fabricated parts, in almost any requested shape.

Some examples of our fabrication capabilities are:

Ribbon

SAATImotion fabrics can be economically slit using heat or, if a tighter tolerance and improved edge quality are needed, the fabrics can be ultrasonically slit.

Production Technology involved: heat, ultrasonics.



Tubes - Cut to Length

For all applications requiring molded cylindrical filters, SAATI offers fabrics tubes and rectangles with two open ends, cold or laser cut to length.

Many applications can accept the quality of a cold cut tube in view of its economic advantage. On the contrary, if the component must have one end sealed and one end open, SAATI is able to combine the two technologies in the same process and supply tubes with one ultrasonically sealed end.

Ultrasonic technology is also applied to the realization of rectangle filters.

Production technology involved: cold, heat, ultrasonic.



Continuous Tubes

Two layers of filter media are simultaneously slit with heated blades to form a continuous tube.

Ultrasonically welded tubular ribbons, although similar in construction to heat slit items, can be produced in a wide range of sizes, including very small ones.

Two or more narrow layers can be attached using ultrasonic slitting, a fine filtration media can be supported or protected with a coarser one.

Production Technology involved: heat, ultrasonics.



Pleated Components

Mono or Multi-layer pleated components such as pack, ribbon and cartridges, can be manufactured for all applications requiring high filtration capacity in a narrow space.

Production technology involved: heat and ultrasonics.



Shapes

Cold or Laser cut parts can be provided in almost any shape or size with nominal dimensional quality.

One or more layers of fabrics can be ultrasonically cut or sealed into virtually any shape using a CNC plotter, assuring a faithful reproduction of design.

Production Technology involved: cold (die-cut), ultrasonics, laser.







Lamination Capabilities

Laminated Fabrics

SAATI is able to laminate different combination of products for every filtration need:

Woven Fabric + Woven Fabric

- Progressive filtration
- Combination with different functionality
- High protection from dust and metal particles
- · Strict airflow control
- Possibility to have Hyphobe® coating for water and oil repellency
- Aesthetic solution



Woven Fabric + Non-Woven

- · High dust holding capacity
- Pre-filtration function
- Protection against heavy particles
- Stiffness and good workability
- · Combination of different polymers



Interactive Product Index

Click a page number to view the product/topic

Finishing 14

Hyphobe 16

Fuel/Water Separation

Α	Н	R
Antistatic Finishing 14	Hydrophilic Treatment 14	Ribbon 18
C Cabin Filters 8 Class 10,000 Clean Room 3 Company Information 3 Continuous Tubes 19	Hydrophobic Treatment 14 Hyphobe 15 Hyphobe Fuel/Water Separation 16	S SAATI Fabrics 10 SAATImotion Hyphobe 16 Shapes 19 Surface Treatments 14
Customer Focus 5	ISO 7 Clean Room 3	-
D	ISO 10993 3	Tubes - Cut to Length 18
Dyeing 14	L	U
F	Lamination Capabilities 20	UNI ISO 9001 3
Fabricated Parts 18	М	USP CLASS VI 3
Fabricated Continuous Tubes 19 Fabricated Pleated	Mesh Opening 8 Metalization 14	V Vehicle Diagram 8
Components 19 Fabricated Ribbon 18	P	W
Fabricated Shapes 19	PEEK Fabrics 12	Washing Systems 8
Fabricated Tubes - Cut	Plasma Treatment 14 Pleated Components 19	Weave Types 10
to Length 18	Powertrain 9	Woven Fabric + Non- Woven Lamination 20
Fabric Dyeing 14 Fabrics 8		Woven Fabric + Woven Fabric Lamination 20







Notes

Take notes before you contact **SAATI Customer Service**

-S/4\TI

SAATI S.p.a

22070 Appiano Gentile (Co), Italy Tel: +39 0319711

SAATI Americas Corp.

201 Fairview St. Extension Fountain Inn, SC 29644 Toll-Free: +1 800 431 2200 Fax: +1 864 862 0089 E-mail: info.us@saati.com

SAATI Technical Fabrics (Tianjin) Co., Ltd.

and Saida Century Avenue, Xiqing Economic Development Area, Tianjin, China 300385 Tel: +86 22 23960843 Fax: +86 22 23962116 E-mail: info.cn@saati.com

SAATI Korea Ltd.

22, Dangjeong-ro, Gunpo-si Gyeonggi-do, 435-833, Korea Fax: +82 31 429 9338

SAATI France

74 Route de Bapaume 80360 Sailly Saillisel, France Phone: +33 3 22 85 77 00 Fax: +33 3 22 85 77 00

SAATI Deutschland GMBH

Ostring 22 46348 Raesfeld, Germany Phone: +49 2865 95800 Fax: +49 2865 958010 E-mail: info.de@saati.com

Connect with SAATI













